


Wire and Tube Thermocouples

Beaded Wire Thermocouple

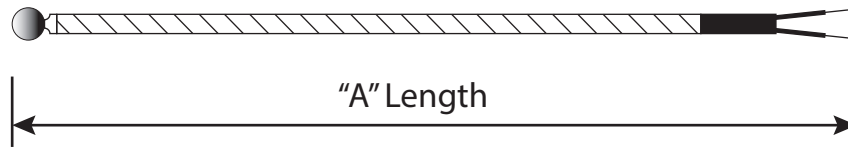

TC - - - **X** -

Insulation*

Glass (900°F) GG
 PFA Teflon (500°F) TT
 High Temp Glass (1300°F) ... HH
 Glass w/SS Braid (900°F) SB

*For insulation descriptions and special insulations, inquire about more thermocouple wire options

Calibration*

Iron Constantan J
 Chromel Alumel K
 Chromel Constantan E
 Copper Constantan T

*For additional calibrations call sales

Termination*

MCL .. Mini Male (400°F)
 MCH .. Mini Hi-Temp Male (800°F)
 MFL .. Mini Female(400°F)
 MFH .. Mini Hi-Female (800°F)
 SCL .. Standard Male (400°F)
 SCH .. Standard Hi-Temp Male (800°F)
 SFL .. Standard Female (400°F)
 SFH .. Standard Hi-Temp Female (800°F)
 SPL .. Spade Lugs
 STR .. 3/4" Stripped Leads

*Special connectors available. Call Sales

"A" Length

Specify in inches

Wire Gauge

20	30	20S *
24	36	24S *

*Stranded Wire available in 20 & 24 awg TT or GG insulationn only.

Exposed junction thermocouples fill your need for low cost sensors. Fast, accurate & affordable, they are made with "Special Limits" wire. Consult sales for NIST traceability.