


Washer Thermocouples

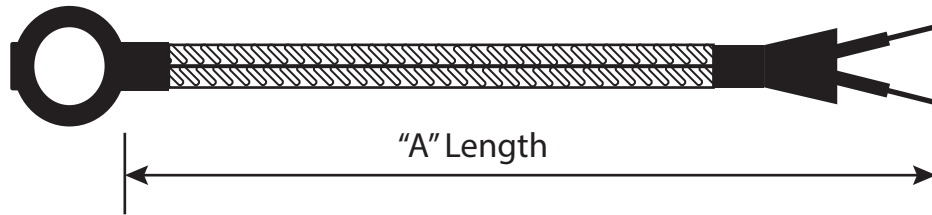

WT - - - **X** -

Calibration*

Iron Constantan J
 Chromel Alumel K
 Chromel Constantan E
 Copper Constantan T

*For additional calibrations call sales

Screw Size

No. 8 (4mm) 8
 No. 10 ... (4mm) 10
 1/4" (6mm) 14

Insulation*

Glass (900°F) GG
 PFA Teflon (500°F) ... TT
 High Temp Glass (1300°F) ... HH
 Glass w/SS Braid SB

*For insulation descriptions and special insulations, inquire about more options.

Termination*

MCL - Mini Male (400°F)
 MCH - Mini Hi-Temp Male (800°F)
 MFL - Mini Female (400°F)
 MFH - Mini Hi-Temp Female (800°F)
 SCL - Standard Male (400°F)
 SCH - Standard Hi-Temp Male (800°F)
 SFL - Standard Female (400°F)
 SFH - Standard Hi-Temp Female (800°F)
 SPL - Spade Lugs
 STR - 3/4" Stripped Leads

*Special connectors available. Call Sales

"A" Length

Specify in inches

- Washer Thermocouples are made with "Special Limits" wire.
- No. 8 has 24 gauge wire
- No. 10 & 1/4" have 20 guage wire.