


Tube & Wire Thermocouples with Teflon Protection

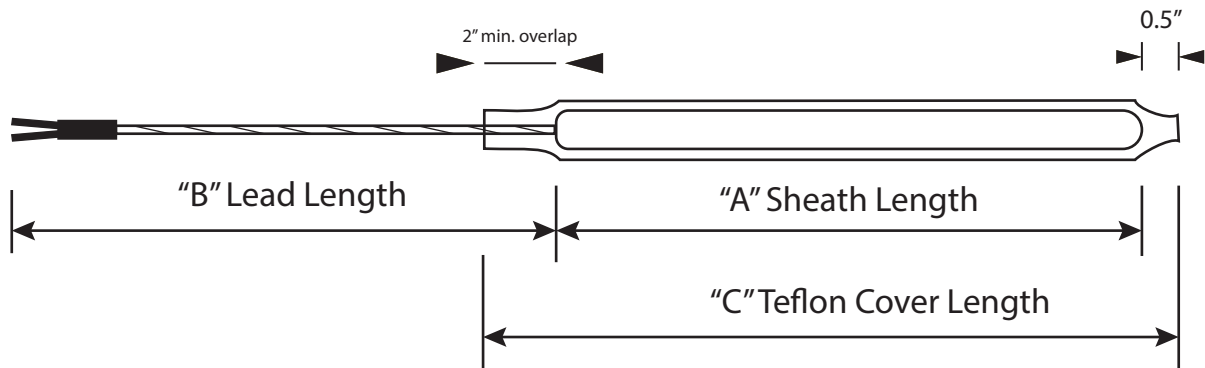

TP – – – – – –

"B" Lead Length
Specify in inches

Calibration*

Iron Constantan J
 Chromel Alumel K
 Copper Constantan T

*For additional calibrations call sales

Sheath O.D. (in.)

18 0.125 (0.188" finished O.D.)
 316 0.188 (0.250" finished O.D.)

Termination

MCL .. Mini Male
 MFL .. Mini Female
 SCL .. Standard Male
 SFL .. Standard Female
 SPL .. Spade Lugs
 STR .. 3/4" Stripped Leads N/C

*Special connectors available. Call Sales

"C" Teflon Cover Length
Specify in inches

"A" Sheath Length
Specify in inches

- Max. operating temperature 200°C / 392°F
- 24 guage Teflon wrap and fused leads standard
- Heavy wall teflon cover ensures liquid and vapor tight for a wide variety of immersion applications
- Minimum overlap from sheath onto leads is 2"