

THERM-X
THE TEMPERATURE SPECIALISTS

PYRAWRAP HEATER TAPE




pyrawrap heater tape

www.therm-x.com

Grounded Heating Tapes

FEATURES:

- Constructed using high temperature heat treated fiberglass.
- Heat tapes can be exposed to upto 540° C.
- Knitted with high temperature thread.
- Highly flexible.
- Grounded for safety.
- Power plug included on all 120VAC heating tapes.
- High temperature lead wires attached with proper strain relief techniques.

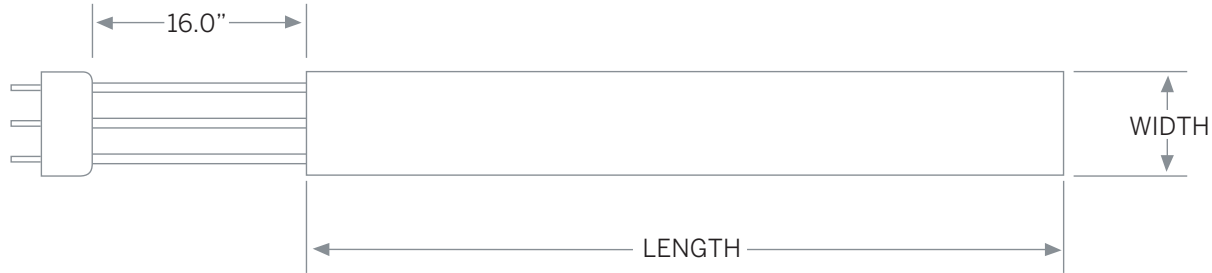

Specifications

- Maximum Exposure Temperature: 540°C
- Voltage: 110 - 120VAC
- Power Density: 50 to 100 WATT/FT
- Power Lead: 16" long, 16AWG Wires
- Power Plug for 120V Heaters:
 - 2-Pole 3-Wire Grounding, 5-15P
 - Terminal Block supplied for 240V

Accessories

- Temperature Controllers
 - Portable Control Units (PCU)
 - Rack Mount Control Panels (RMCP)
 - Industrial Control Panels (ICP)
- Temperature Sensors
 - Thermocouples
 - Thermistors
 - RTDs
 - Solid State Sensors
- 500°F Fiberglass Impregnated Adhesive Tape

Catalog Numbering System

Therm-Wrap Grounded Heater Tape		TWG - WW - LL - VVV - PPPP -X			
Width					
.5	0.5"				
10	1.0"				
Length					
02	2FT				
04	4FT				
08	8FT				
10	10FT				
12	12FT				
16	16FT				
20	20FT				
Voltage Rating					
120	120VAC				
240	240VAC				
Power Density					
050	50WATT/FT				
100	100WATT/FT				
Special					

Special order option available for other sizes and power densities.